
Supervision


- Elastic Search Installation

Elastic Search Installation


Voici la procédure pour installer l’agent APM pour TOMCAT Linux.

La dernière version actuelle est : elastic-apm-agent-1.46.0.jar

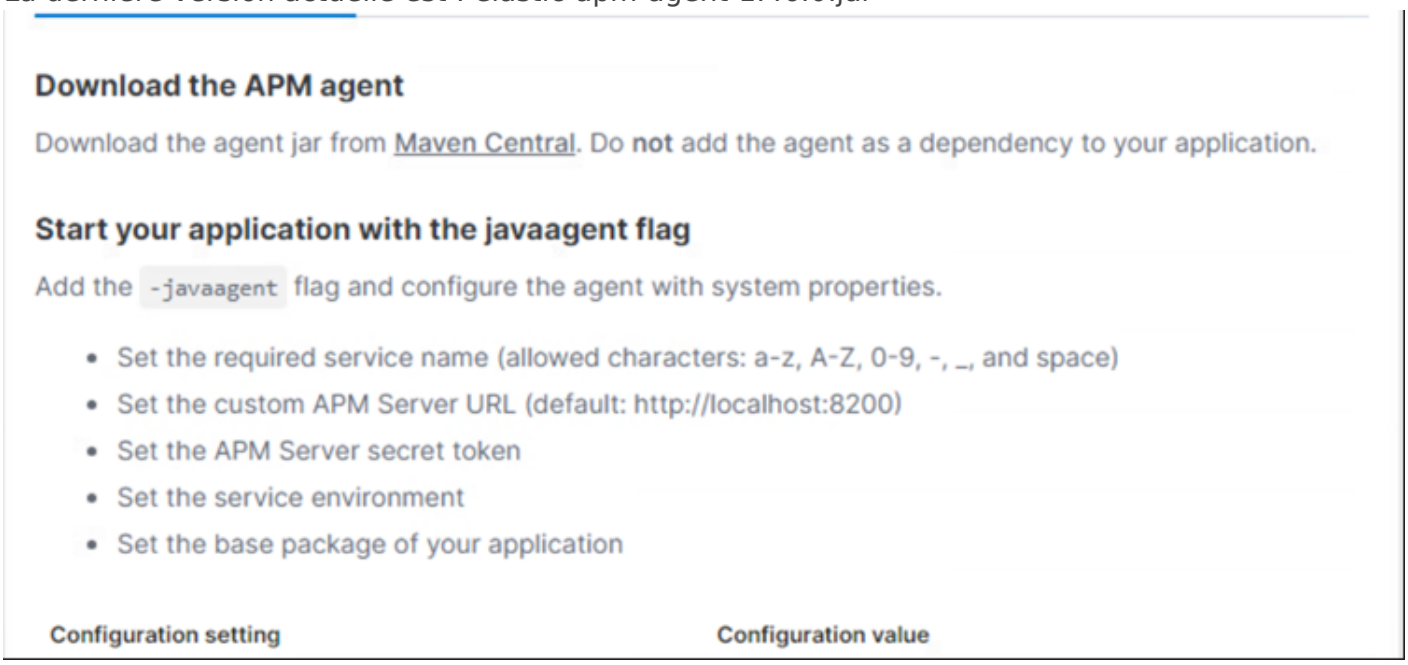

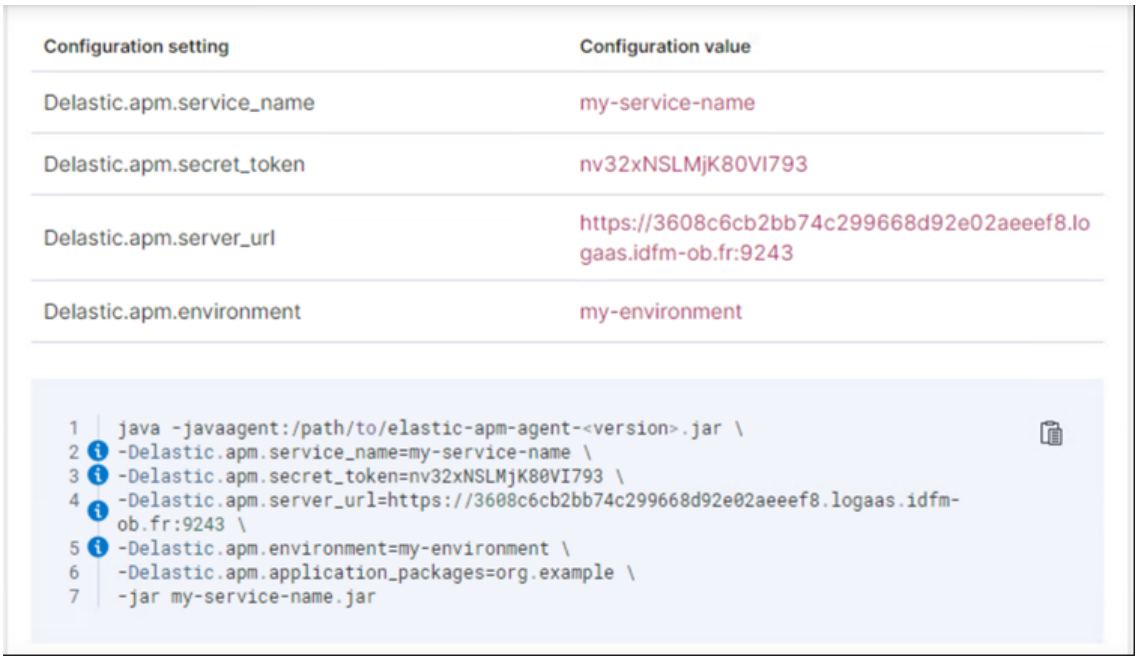


Voici la procédure pour installer l’agent APM pour Ruby on Rails Linux.

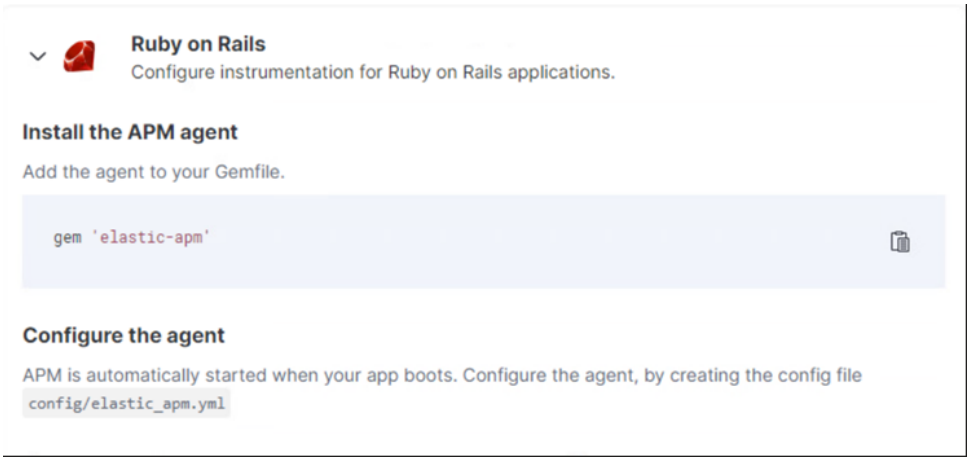




Voici la procédure pour installer l’agent APM pour TOMCAT Windows.

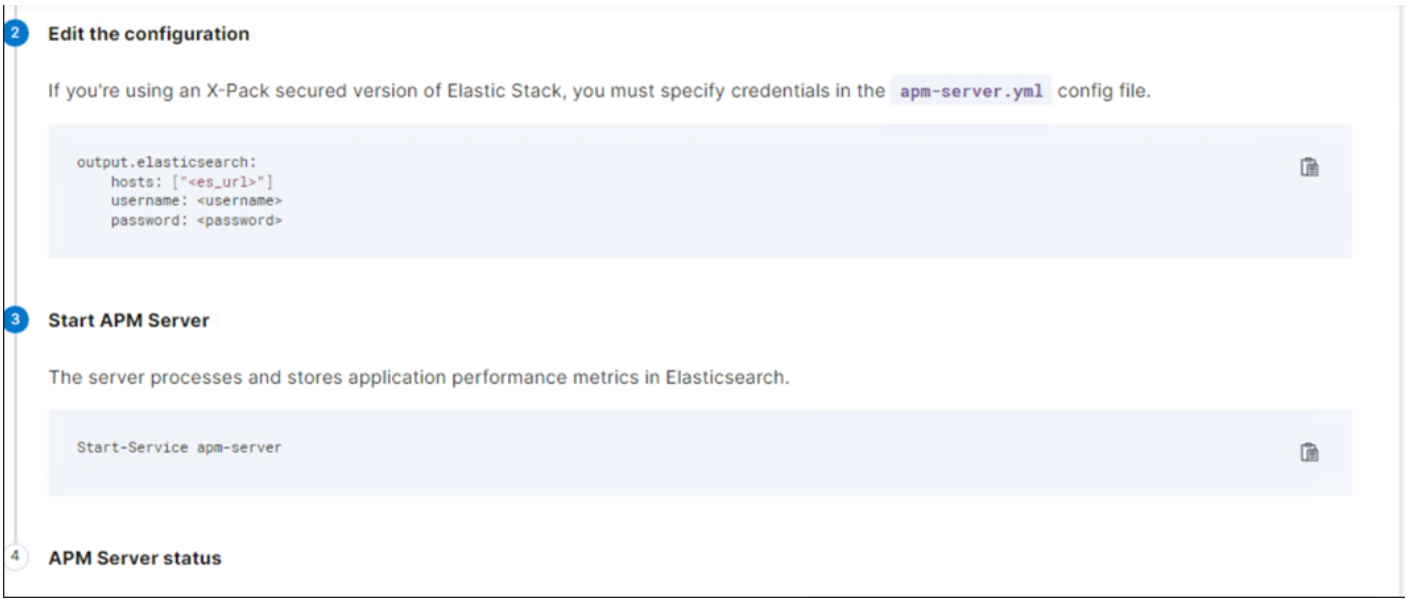

Voici la procédure pour installer l’agent APM pour ASP.net.

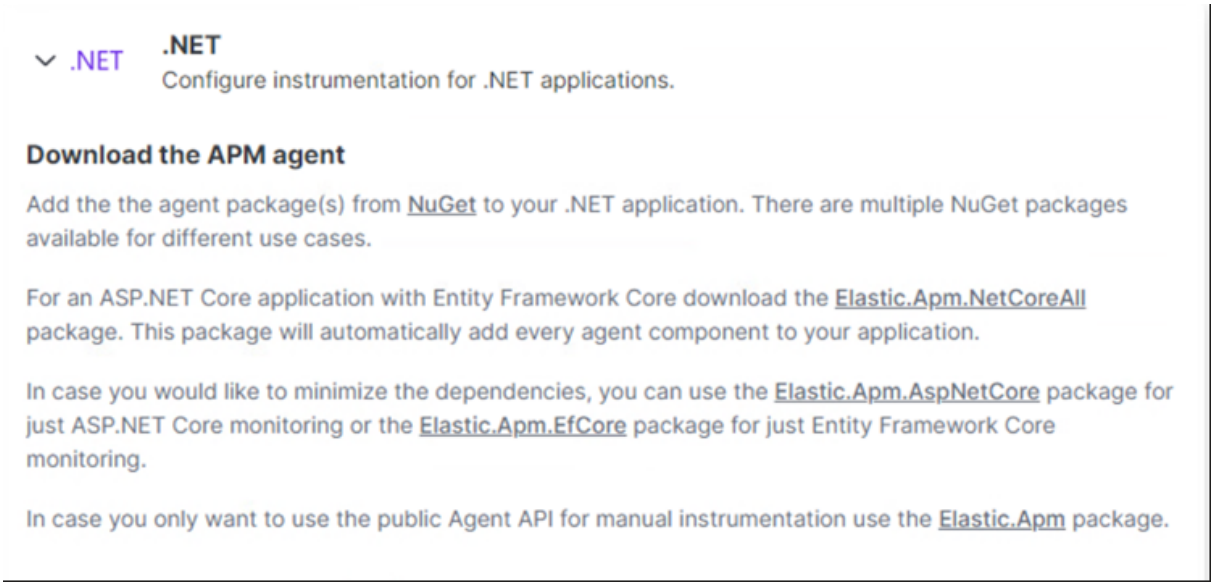

Add the agent to the application

In case of ASP.NET Core with the `Elastic.Apm.NetCoreAll` package, call the `UseAllElasticApm` method in the `Configure` method within the `Startup.cs` file.

```
public class Startup

  public void Configure(IApplicationBuilder app, IHostingEnvironment env)

    app.UseAllElasticApm(Configuration);
    //…rest of the method

  //…rest of the class
```

Passing an `IConfiguration` instance is optional and by doing so, the agent will read config settings through this `IConfiguration` instance (e.g. from the `appsettings.json` file).

Configuration setting	Configuration value
ServiceName	my-service-name
SecretToken	nv32xNSLMjK80VI793
ServerUrl	https://3608c6cb2bb74c299668d92e02aeeef8.logaas.idfm-ob.fr:9243
Environment	my-environment

```
{
  "ElasticApm": {
    "ServiceName": "my-service-name",
    "SecretToken": "nv32xNSLMjK80VI793",
    "ServerUrl": "https://3608c6cb2bb74c299668d92e02aeeef8.logaas.idfm-ob.fr:9243",
    "Environment": "my-environment",
  }
}
```

Voici la procédure pour installer l’agent APM pour Node.js

Node.js

Configure instrumentation for Node.js applications.

Install the APM agent

Install the APM agent for Node.js as a dependency to your application.

```
npm install elastic-apm-node --save
```

Configure the agent

Agents are libraries that run inside of your application process. APM services are created programmatically based on the `serviceName`. This agent supports a variety of frameworks but can also be used with your custom stack.

Configuration setting	Configuration value
serviceName	my-service-name
secretToken	nv32xNSLMjK80VI793
serverUrl	https://3608c6cb2bb74c299668d92e02aeeef8.logaas.idfm-ob.fr:9243
environment	my-environment

```
// Add this to the very top of the first file loaded in your app
var apm = require('elastic-apm-node').start({
  serviceName: 'my-service-name',

  secretToken: 'nv32xNSLMjK80VI793',

  serverUrl: 'https://3608c6cb2bb74c299668d92e02aeeef8.logaas.idfm-ob.fr:9243',

  environment: 'my-environment'
})
```