

HAproxy.conf

Config sur les machines proxy


```
[root@ ~]# cat /etc/haproxy/haproxy.cfg
frontend pgsql_frontend
  bind *:5432
  mode tcp
  default_backend pgsql_backend

backend pgsql_backend
  mode tcp
  balance roundrobin
  option pgsql-check user postgres # Utilisation de l'utilisateur postgres pour la vérification
  server [REDACTED] 16.25:5432 check port 8008
  server [REDACTED] 16.26:5432 check port 8008
  server [REDACTED] 16.8:5432 check port 8008
# option redispatch 1s
option httpchk
http-check send hdr Content-Type "application/json;charset=UTF-8" hdr Host [REDACTED] body "{\"id\": 3, \"role\": \"master\"}"

#frontend pgsql_write_frontend
# bind *:5433
# mode tcp
# default_backend pgsql_write_backend

#backend pgsql_write_backend
# mode tcp
# balance roundrobin
# option pgsql-check user postgres # Utilisation de l'utilisateur postgres pour la vérification
# server [REDACTED] 16.25:5432 check port 8008
# server [REDACTED] 16.26:5432 check port 8008
```

Format json pour vérification :

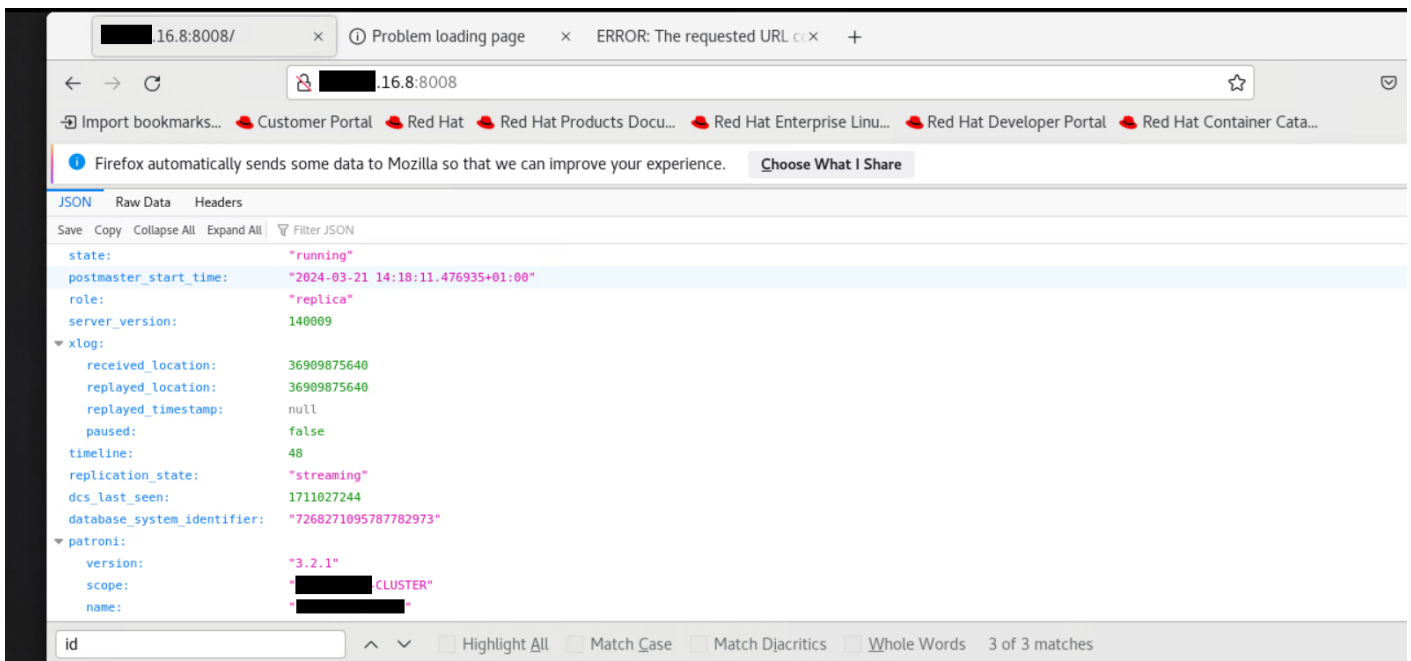

Revision #1

Created 31 October 2024 23:23:05 by Cavallone

Updated 31 October 2024 23:25:46 by Cavallone